




BEARING PRECISION AXLE CORP.

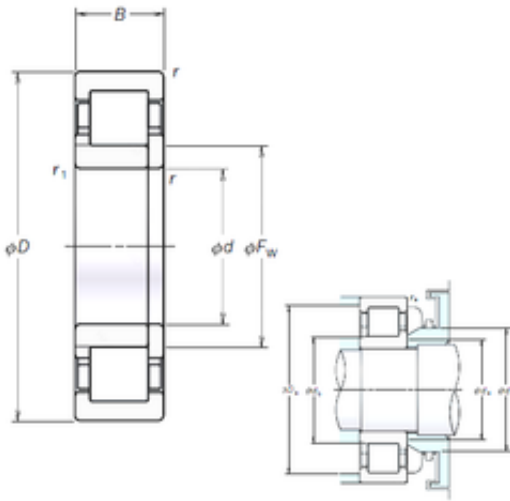

190 mm x 400 mm x 132 mm NSK
NUP2338EM cylindrical roller bearings

Bearing No. NUP2338EM

NUP2338EM Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|----------------|
| Size | 190x400x132 mm |
| Bore Diameter | 190 mm |
| Outer Diameter | 400 mm |
| Width | 132 mm |
| d | 190 mm |
| Fw | 240 mm |
| D | 400 mm |
| B | 132 mm |
| C | 132 mm |
| r min. | 5 mm |
| r1 min. | 5 mm |
| da min. | 210 mm |
| Da max. | 380 mm |
| db max. | 235 mm |
| db min | 210 mm |
| ra max. | 4 mm |
| rb max. | 4 mm |
| S | 6,2 mm |
| Db max | 380 mm |
| Weight | 86,2 Kg |
| Basic dynamic load rating (C) | 1770 kN |
| Basic static load rating (C0) | 2520 kN |
| (Grease) Lubrication Speed | 1300 r/min |
| hidYobi | NUP2338EM |
| LangID | 1 |



BEARING PRECISION AXLE CORP.

| | |
|------------|-------------|
| D_ | 400 |
| Macha rpm | 2000 |
| B_ | 132 |
| hidTable | ecat_NSCLDR |
| Oil rpm | 1600 |
| rb | 4 |
| mass | 88.1 |
| GRS rpm | 1300 |
| ra | 4 |
| db max | 235 |
| TSR rpm | 1400 |
| C0 | 2520 |
| DE_ | 352 |
| Prod_Type3 | CRB_SR_NUP |
| da | 210 |
| DA_ | 56 |
| Z_ | 14 |
| D_a max | 380 |
| yobi | NUP2338EM |
| dd min | 268 |
| C_conv | 1770000 |
| ALPHA_ | 0 |
| SDM_ | 296 |
| r | 5 |
| dc min | 248 |
| KBRG | 4165 |
| SBRG | 23 |
| r1 | 5 |
| DI_ | 240 |