




BEARING PRECISION AXLE CORP.

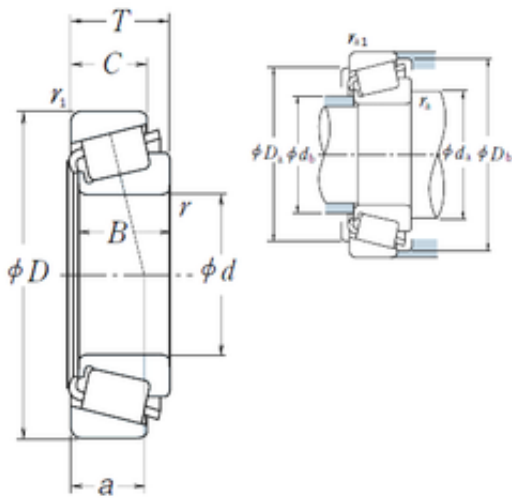

42,875 mm x 76,2 mm x 25,4 mm NSK
26884/26823 tapered roller bearings

Bearing No. 26884/26823

26884/26823 Bearing 2D drawings and 3D CAD models

Size	42.875x76.2x25.4 mm
Bore Diameter	42,875 mm
Outer Diameter	76,2 mm
Width	25,4 mm
d	42,875 mm
D	76,2 mm
T	25,4 mm
B	25,4 mm
C	20,638 mm
ra1 max.	1,5 mm
a	18 mm
r min.	3,5 mm
r1 min.	1,5 mm
Da	69 mm
db	48,5 mm
ra max.	3,5 mm
da	55 mm
Db	73 mm
Weight	0,473 Kg
Basic dynamic load rating (C)	77 kN
Basic static load rating (C0)	98,5 kN
(Grease) Lubrication Speed	4800 r/min
(Oil) Lubrication Speed	6300 r/min
Calculation factor (e)	0,32
Calculation factor (Y0)	1



BEARING PRECISION AXLE CORP.

LangID	1
ALP23	0
outer r	1.5
ALP22	0
D_	76.2
ALP21	24
SHOG_yobi	26884R/26823R
RAr	173.558
inner r	3.5
GRS rpm	4800
D_b	73
D_a	69
DE_	68.237
SLR	18
Prod_Type3	TRBSR_ID_A
BETA_	1
ALPHA_	12
SDM_	59.835
DA1	9.237
DA2	8.283
hidYobi	26884/26823
Y1	1.9
B_	25.4
Oil rpm	6300
hidTable	ecat_NSTPRI
Y0	1
inner ra	3.5
outer rb	1.5
C0	98.5
CUP	0.136
e	0.32
DA_	8.762



BEARING PRECISION AXLE CORP.

BET21	3
BET22	3
BET23	0
Z_	18
C_	20.638
yobi	26884/26823
KBRG	3161
CONE	0.337
DI_	51.173