




BEARING PRECISION AXLE CORP.

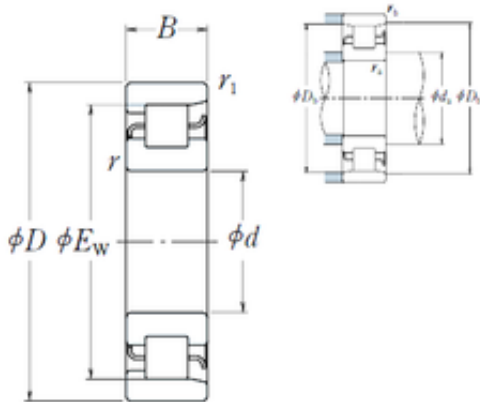

130 mm x 200 mm x 33 mm NSK NF1026
cylindrical roller bearings

Bearing No. NF1026

NF1026 Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|---------------|
| Size | 130x182x33 mm |
| Bore Diameter | 130 mm |
| Outer Diameter | 182 mm |
| Width | 33 mm |
| d | 130 mm |
| D | 200 mm |
| Ew | 182 mm |
| B | 33 mm |
| C | 33 mm |
| r min. | 2 mm |
| r1 min. | 1,1 mm |
| da min. | 139 mm |
| Db min. | 184 mm |
| ra max. | 2 mm |
| rb max. | 1 mm |
| Db max | 193,5 mm |
| Weight | 3,66 Kg |
| Basic dynamic load rating (C) | 172 kN |
| Basic static load rating (C0) | 238 kN |
| (Grease) Lubrication Speed | 3 200 r/min |
| hidYobi | NF1026 |
| LangID | 1 |
| D_ | 200 |
| B_ | 33 |
| hidTable | ecat_NSCLDR |



BEARING PRECISION AXLE CORP.

| | |
|------------|-----------|
| Oil rpm | 3800 |
| rb | 1 |
| mass | 3.76 |
| GRS rpm | 3200 |
| ra | 2 |
| TSR rpm | 4000 |
| D_b max | 193.5 |
| C0 | 238 |
| DE_ | 182 |
| Prod_Type3 | CRB_SR_NF |
| da | 139 |
| DA_ | 17 |
| Z_ | 23 |
| D_a max | 191 |
| yobi | NF1026 |
| C_conv | 172000 |
| ALPHA_ | 0 |
| SDM_ | 165 |
| r | 2 |
| D_b min | 185 |
| KBRG | 4124 |
| SBRG | 10 |
| r1 | 1.1 |
| DI_ | 148 |